


S3219 PLUS

LITHIUM ELECTRIC SCISSOR LIFT

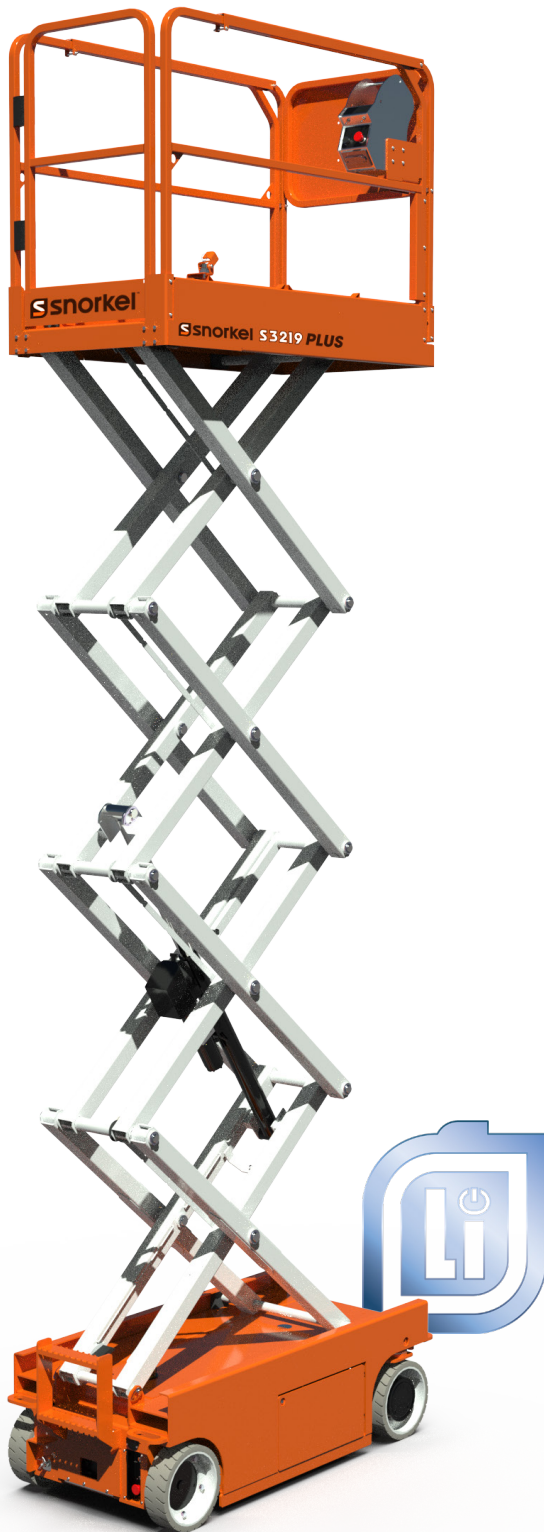

- Electrically operated
- No hydraulic hoses
- Low step-in platform height
- NO FOLDING RAILS
- Fits standard doorways
- Large non-marking tires
- Indoor/Outdoor operation
- 5-year battery warranty

 **snorkel**[™]
www.snorkellifts.com

ELECTRIC DRIVE SLAB SCISSOR LIFT

S3219 PLUS

DIMENSIONS

Max. Working Height	25 ft (7.62m)
Max. Platform Height (A)	19 ft (5.79m)
Platform Size (Stowed)	31.5 in x 69 in (0.8m x 1.75m)
Platform Size (Extended)	31.5 in x 105 in (0.8m x 2.66m)
Deck Extension Length	36 in (0.91m)
Overall Length (C)	72 in (1.8m)
Overall Width (D)	32 in (0.81m)
Stowed Height (B)	78.75 in (2.0m)
Ground Clearance (Stowed)	2.63 in (0.06m)

PERFORMANCE

Platform Capacity (SWL)	600 lbs (272.1kg)
Max. Wind Speed	28 mph (45kph)
Max. Drive Height	19 ft (5.79m)
Max. Drive Speed (Stowed)	2.0 mph (3.21kph)
Max. Drive Speed (Elevated)	0.4 mph (0.6kph)
Raise/Lower Time	35/20 sec
Gradeability	25%
Max. Operation Slope (side-to-side)	1.5 degrees
Max. Operation Slope (front-to-back)	4 degrees
Inside Turning Radius	5 in (0.12m)
Outside Turning Radius	58 in (1.47m)
Tires	12.7 in (0.32m)
Controls	Proportional
Drive System	Dual DC Motors
Parking Brake	2-wheel, spring applied


POWER

Power Source	Two (2) 24V 60Ah Lithium Batteries
Charger	20A


WEIGHT

Weight	2,900 lbs (1315.4kg)
--------	----------------------

TURNING RADIUS

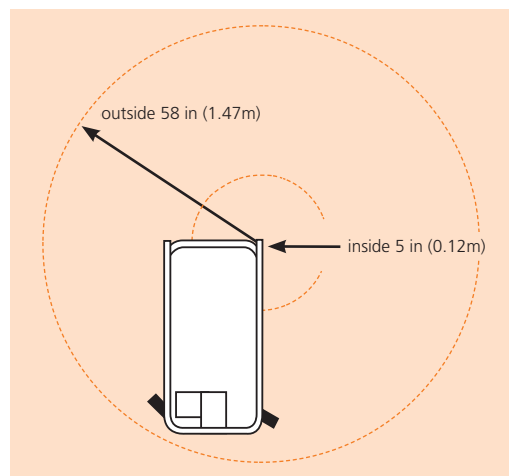

**TAKE A
TOUR**

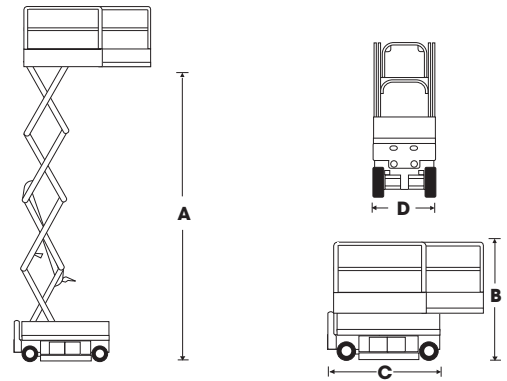

STANDARD FEATURES

- 100% Operation 2 person indoor, 1 person outdoor
- Lithium battery operated scissor lift
- No hydraulic hoses
- Fits standard doorway *without* folding rails
- Roll-out-deck with dual locks
- Non-marking tires—largest wheels/tires in class
- Heavy-duty spindles/steering
- Heavy-duty fixed control box
- Descent and all-motion alarms
- ANSI A92.20 compliant
- Proportional control, all functions
- Platform overload protection
- 110 V (15 amp) power to platform
- On-board diagnostics, hour meter, battery meter
- Automatic integrated battery charger
- Manual safety lowering system
- Flashing amber strobe
- Forklift pockets, crane lifting points
- Lanyard attachment points
- Swing-out service trays
- 2-year parts & labor warranty
- 5-year lithium battery & structural warranty

snorkel

www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-free: 1 (800) 255-0317
Fax: 1 (785) 989-3070
Email: sales.usa@snorkellifts.com